

Nest-D

Indoor Lighting - Suspended



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Housing	Aluminum Injection
Diffuser	Multiple Matte Black Reflector

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	UGR < 22
CRI	CRI > 80

ELECTRICAL




Power (W)	35-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Life L80B50	50.000 Hour

OPTIONAL

DALI
1-10V DIM
Tunable White
Emergency Lighting Unit
CRI < 90
2700~6500K
Different RAL Color Options
Plug-in Connector
Class-I Protection Class
AC-DC Supply(MBS)

MOUNTING

Mounting Type Pendant

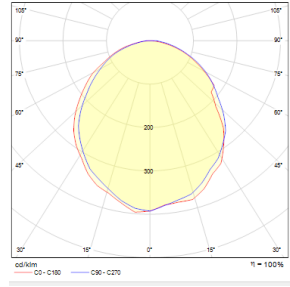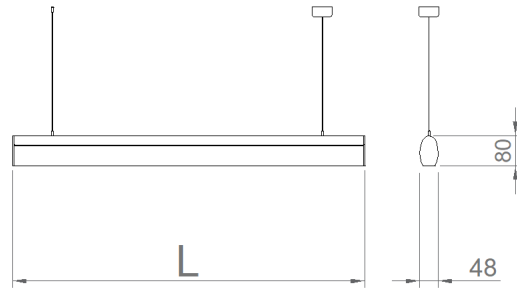

Order Code	W	Dimension- L (mm)	CCT	CRI	Dimension- L (mm)	Kg
01180.47.30.030	35	3000	3000	Ra>80	1145	1,8
01180.47.40.031	35	3200	4000	Ra>80	1145	1,8
01180.47.30.037	41	3760	3000	Ra>80	1425	2,3
01180.47.40.039	41	4000	4000	Ra>80	1425	2,3



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

