

Shield-G-600-IP65

Indoor Lighting - Clean Room



TECHNICAL INFORMATION

Housing	Sheet steel housing
Optics	UV-stabilized opal diffuser
Diffuser	Tempered, transparent glass
LED Lifetime	50.000 hours
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL



Power (W)	35-45W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
1-10V DIM
Tunable White
Emergency Lighting Unit

MOUNTING

Mounting Type	Recessed
----------------------	----------

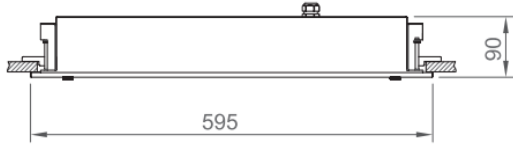

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Cut-out (mm)	Kg
02125.66.30.035	35	LED Module	3300	3000	595x595x90	580x580	7,3
02125.66.40.036	35	LED Module	3400	4000	595x595x90	580x580	7,3
02125.66.30.042	45	LED Module	4200	3000	595x595x90	580x580	7,3
02125.66.40.043	45	LED Module	4300	4000	595x595x90	580x580	7,3



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

