


Duet-P

Indoor Lighting - Suspended

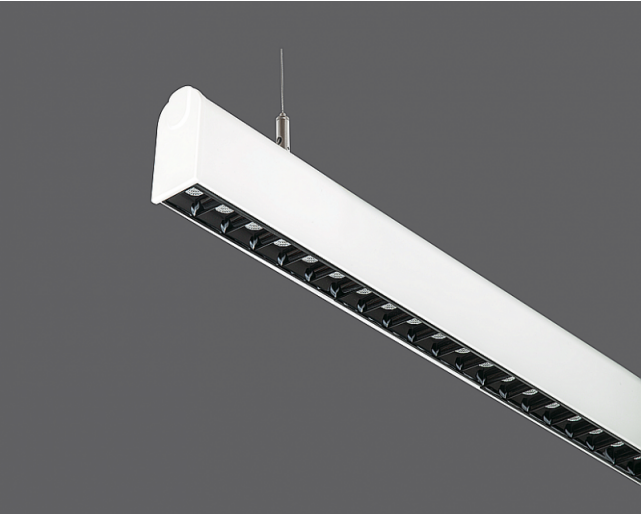

TECHNICAL INFORMATION

Housing	Extruded aluminum profile
Optics	Dark reflector with glare control
LED Lifetime	50.000 hours
Mounting System	Pendant

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	36°
UGR Value	80

ELECTRICAL



Power (W)	22-34W
Power Factor	>95
Light Source	SMD Mid Power LED
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

MOUNTING

Mounting Type	Pendant
----------------------	---------

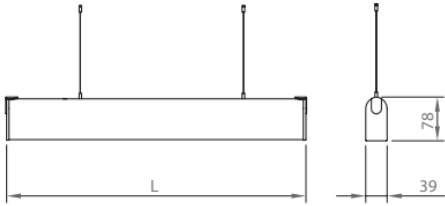

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
01181.37.30.024	22	LED Module	2400	3000	39x1225x78	3,6
01181.37.40.025	22	LED Module	2540	4000	39x1225x78	3,6
01181.37.30.036	34	LED Module	3660	3000	39x1495x78	4,4
01181.37.40.038	34	LED Module	3880	4000	39x1495x78	4,4

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

