

Duet-R

Indoor Lighting - Tracklights



TECHNICAL INFORMATION

Housing	Extruded aluminum profile
Optics	Dark reflector with glare control
LED Lifetime	50.000 hours
Mounting System	Track mounted

OPTICAL SPECIFICATIONS

Optical	Directional
Light Exit Angle	36°
UGR Value	80


ELECTRICAL

Power (W)	11-33W
Power Factor	>95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI

MOUNTING

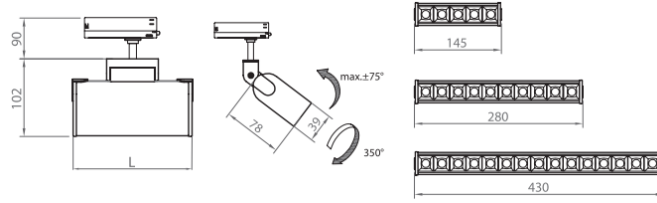

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
01189.37.30.011	12	LED Module	1200	3000	39x145x102	0,45
01189.37.40.012	12	LED Module	1280	4000	39x145x102	0,45
01189.37.30.021	24	LED Module	2400	3000	39x280x102	0,75
01189.37.40.022	24	LED Module	2560	4000	39x280x102	0,75
01189.37.30.036	36	LED Module	3600	3000	39x430x102	1,15
01189.37.40.038	36	LED Module	3840	4000	39x430x102	1,15



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects. İkizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

ikizler