


Flat-G 300

Indoor Lighting - Recessed

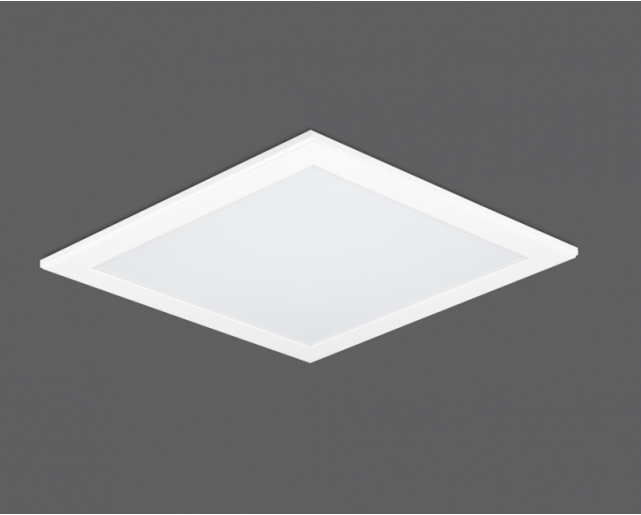

TECHNICAL INFORMATION

Housing	Sheet steel housing & aluminium frame
Optics	UV-stabilized opal diffuser
LED Lifetime	50.000 hours
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL



Power (W)	9-18W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit
1-10V DIM
Tunable White

MOUNTING

Mounting Type Recessed

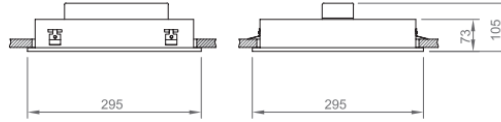

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Cut-out (mm)	Kg
02110.33.30.008	9	LED Module	900	3000	295x295x73	275x275	1,4
02110.33.40.009	9	LED Module	980	4000	295x295x73	275x275	1,4
02110.33.30.017	18	LED Module	1800	3000	295x295x73	275x275	1,4
02110.33.40.018	18	LED Module	1900	4000	295x295x73	275x275	1,4



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

