

# Anemon-650

Outdoor Lighting - Facade Lighting



## TECHNICAL INFORMATION

<b>Housing</b>	Extruded aluminum profile housing
<b>Optics</b>	Acrylic optic lens for facade lighting
<b>Glass</b>	Tempered, transparent glass diffuser
<b>LED Lifetime</b>	50.000 hours

## OPTICAL SPECIFICATIONS

<b>Optical</b>	Symmetrical
<b>Light Exit Angle</b>	10°-25°-45°-120°
<b>UGR Value</b>	80

## ELECTRICAL


<b>Power (W)</b>	29W
<b>Power Factor</b>	>95
<b>Light Source</b>	Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI

## MOUNTING

**Mounting Type** Surface

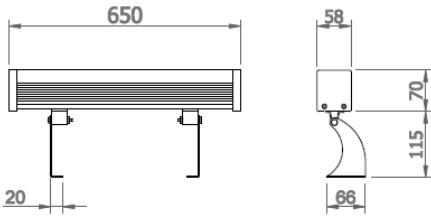

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
05255.65.30.030	29	Power LED	3120	3000	58x650x70	2,9
05255.65.40.030	29	Power LED	3480	4000	58x650x70	2,9

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.  
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.  
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

**Phone:** +90 (216) 397 22 16  
**Fax:** +90 (216) 397 19 19  
**E-Mail:** info@ikizleraydinlatma.com

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

