

Anemon-1250

Outdoor Lighting - Facade Lighting



TECHNICAL INFORMATION

Housing	Extruded aluminum profile housing
Optics	Acrylic optic lens for facade lighting
Glass	Tempered, transparent glass diffuser
LED Lifetime	50.000 hours

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	10°-25°-45°-120°
UGR Value	80

ELECTRICAL


Power (W)	55W
Power Factor	>95
Light Source	Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI

MOUNTING

Mounting Type	Surface
----------------------	---------

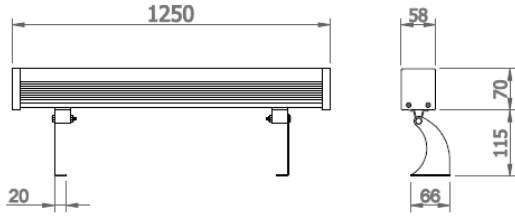

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
05255.12.30.060	55	Power LED	6050	3000	58x1250x70	5,6
05255.12.40.060	55	Power LED	6600	4000	58x1250x70	5,6

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

