

Epic

Indoor Lighting - Downlights & Spotlights



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Die-cast aluminum
Optics	Thermoplastic louvre with glare control - black or white options
LED Lifetime	50.000 hours
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	80°
UGR Value	80

ELECTRICAL



Power (W)	8-20W
Power Factor	>95
Light Source	High Power LED
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

MOUNTING

Mounting Type Recessed

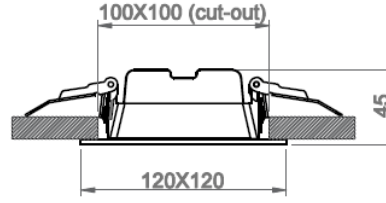

Order Code	W	Light Source	Lm	CCT	Angle (°)	WxLxH (mm)	Cut-out (mm)
05246.11.30.009	8	Power LED	920	3000	80°	120x120x45	100x100
05246.11.40.010	8	Power LED	1055	4000	80°	120x120x45	100x100
05246.11.30.018	20	Power LED	1880	3000	80°	120x120x45	100x100
05246.11.40.021	20	Power LED	2160	4000	80°	120x120x45	100x100
05276.11.30.009	8	Power LED	970	3000	80°	120x120x45	100x100
05276.11.40.010	8	Power LED	1110	4000	80°	120x120x45	100x100
05276.11.30.018	20	Power LED	1970	3000	80°	120x120x45	100x100
05276.11.40.021	20	Power LED	2220	4000	80°	120x120x45	100x100



All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

