

Panoramic-D

Outdoor Lighting - Urban Lighting



TECHNICAL INFORMATION

Housing	Corrosion-resistant aluminum housing
Optics	Optic lens for ideal light distribution
LED Lifetime	50.000 hours


OPTICAL SPECIFICATIONS

ELECTRICAL

OPTIONAL

MOUNTING

Mounting Type	Surface
----------------------	---------

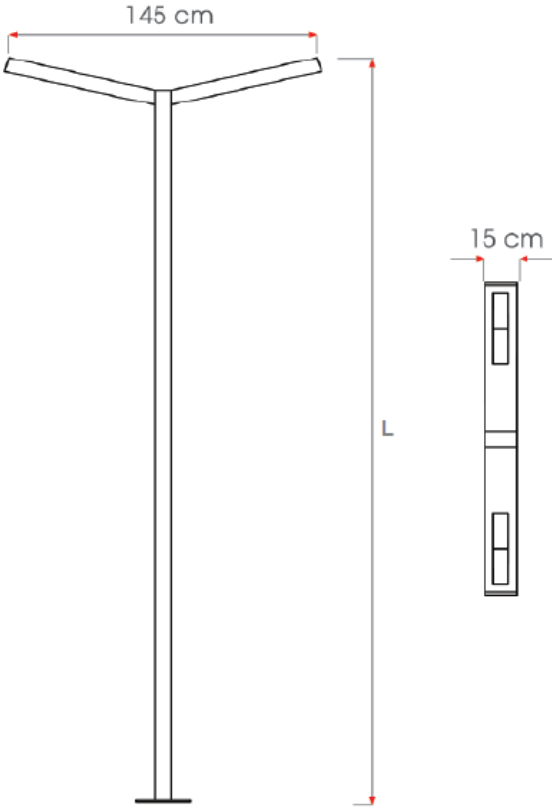

Order Code	W	Light Source	Lm	CCT	WxL
09491.13.60.072	2x40	Power LED	7050	6000	1450x3000
09491.14.60.150	2x60	Power LED	14600	6000	1450x4200
09491.14.60.221	2x75	Power LED	21400	6000	1450x4200
09491.16.60.301	2x90	Power LED	29240	6000	1450x6000

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.