

# Perla-SK1

Indoor Lighting - Downlights & Spotlights



## TECHNICAL INFORMATION

<b>Housing</b>	Aluminum
<b>Optics</b>	Aluminium reflector & transparent diffuser
<b>LED Lifetime</b>	50.000 hours
<b>Mounting System</b>	Surface Mounted

## OPTICAL SPECIFICATIONS


<b>Optical</b>	Symmetrical
<b>Light Exit Angle</b>	50°
<b>UGR Value</b>	95
<b>Light Source</b>	COB LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI

## MOUNTING

**Mounting Type** Surface

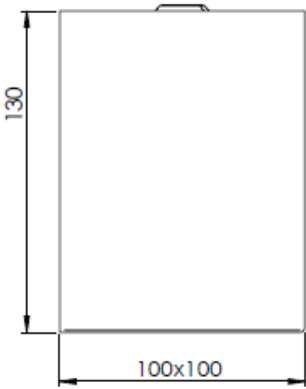

Order Code	W	Light Source	Lm	CCT	Angle (°)	WxLxH (mm)
05480.11.30.007	11	COB LED	710	3000	50°	100x100x130
05480.11.40.007	11	COB LED	770	4000	50°	100x100x130

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.  
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.  
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.