


Perla-SK3

Indoor Lighting - Downlights & Spotlights

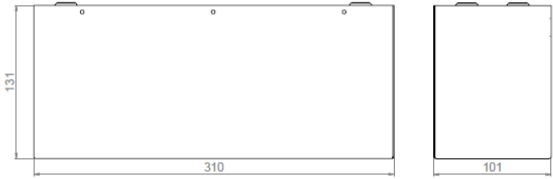

Order Code	W	Light Source	Lm	CCT	Angle (°)	L (mm)
05480.11.30.022	3x11	COB LED	2600	3000	50°	100x296x130
05480.11.40.023	3x11	COB LED	2900	4000	50°	100x296x130

TECHNICAL INFORMATION

Housing	Aluminum
Optics	Aluminium reflector & transparent diffuser
LED Lifetime	50.000 hours
Mounting System	Surface Mounted

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	50°
UGR Value	95
Light Source	COB LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI

MOUNTING

Mounting Type Surface

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

Phone: +90 (216) 397 22 16
Fax: +90 (216) 397 19 19
E-Mail: info@ikizleraydinlatma.com

Please visit our website for our updated information. www.ikizleraydinlatma.com

