

# Canvas-T

Indoor Lighting - Downlights & Spotlights



## TECHNICAL INFORMATION

<b>Housing</b>	Sheet steel housing
<b>Optics</b>	UV-stabilized opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>Mounting System</b>	Surface

## OPTICAL SPECIFICATIONS

<b>Optical</b>	Symmetrical
<b>Light Exit Angle</b>	120°
<b>UGR Value</b>	80

## ELECTRICAL



<b>Power (W)</b>	13-18W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit

## MOUNTING

**Mounting Type** Surface

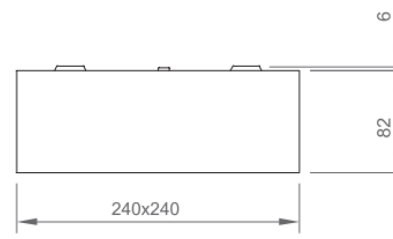

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
05250.22.30.015	13	LED Module	1350	3000	240x240x82	1,1
05250.22.40.016	13	LED Module	1430	4000	240x240x82	1,1
05250.22.30.021	18	LED Module	1850	3000	240x240x82	1,1
05250.22.40.022	18	LED Module	1920	4000	240x240x82	1,1

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.

**Phone:** +90 (216) 397 22 16  
**Fax:** +90 (216) 397 19 19  
**E-Mail:** info@ikizleraydinlatma.com

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

