

FORCE



Standard Colours



Ral 9005



OPTICAL

Beam angle 60° -90°-150° options
Luminous efficacy >100 lm/W
Lifetime (L90/B10): 50000 h. (tq+25°C)
Lifetime (L80/B20): 100000 h. (tq+25°C)
High Power LED module
Color rendering index: CRI>80
MacAdams SDCM 3

MECHANICAL

Extruded aluminium housing
UV stabilized lens
Tempered heat resistant glass diffuser
IP66 protection degree
Impact resistance IK08

ELECTRICAL


Halogen-free wiring
220-240V-50/60Hz
Power factor >0.95
Constant current, Class I, isolated driver
CE - IEC 60598-1 - EN 60598-1
Ambient temperature from -20°C to +50°C
On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)
Emergency battery - (Code .X3HT)
Color temperature (K) options
Suspension kit
Symmetrical or asymmetrical
Cold room (<-20°C) option
Hot environment (>+50°C) option

INSTALLATION

Ceiling surface or suspended mounted.

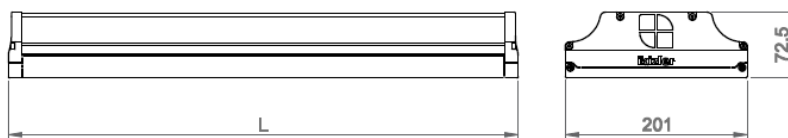

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out (mm)	Weight (kg)
07308.4S.40.100	69W	10500	4000K	Ra>80	201x450x72	N/A	3,5

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.