


Mino 100



Standard Colours



OPTICAL

Direct symmetric distribution
 Beam angle 38°
 Luminous efficacy >100 lm/W
 Lifetime (L90/B10): 50000 h.(tq+25°C)
 Lifetime (L80/B20): 100000 h. (tq+25°C)
 COB LED module
 Color rendering index: CRI>80
 MacAdams SDCM 3

MECHANICAL

Die-cast aluminium housing
 Stainless steel installation clips
 Aluminium reflector
 Transparent diffuser
 IP20 protection degree from below
 Impact resistance IK02
 Glow-wire test resistance 650°C

ELECTRICAL



Halogen-free wiring
 220-240V-50/60Hz
 Power factor >0.95
 Constant current, Class I, isolated driver
 CE - IEC 60598-1 - EN 60598-1
 Ambient temperature from -20°C to +50°C
 On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)
 1-10V - (Code: .MXXX)
 Flicker-free - (Code: .FXXX)
 Emergency battery - (Code.X3HT)
 CBS connection
 Color rendering index: CRI >90
 Color temperature (K) options
 GST type connector for installation
 RAL colour selection

INSTALLATION

Ceiling recessed mounted.

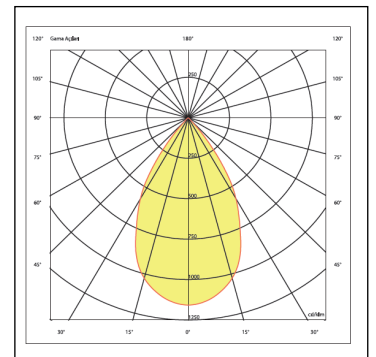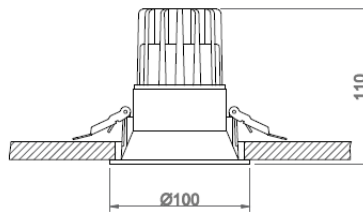

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
05112.10.30.011	12	1300	3000K	Ra>80	100x110	90	0,9
05112.10.40.012	12	1350	4000K	Ra>80	100x110	90	0,9
05112.10.30.014	15	1350	3000K	Ra>80	100x110	90	0,9
05112.10.40.015	15	1425	4000K	Ra>80	100x110	90	0,9
05112.10.30.006	19	1710	3000K	Ra>80	100x110	90	0,9
05112.10.40.006	19	1800	4000K	Ra>80	100x110	90	0,9

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.