


# U-LINE



## Standard Colours

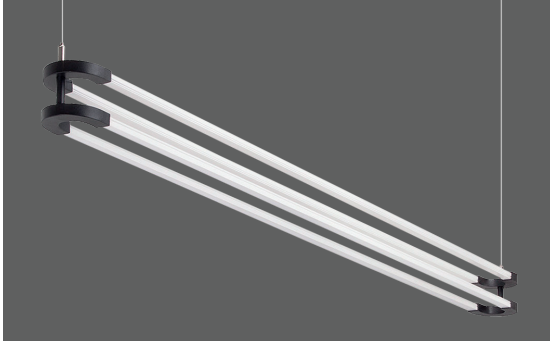

Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Direct&Indirect light distribution

Beam angle 140°

UGR<22

Lifetime (L90/ B10): 50000 h.(tq+25°C)

Lifetime (L80/B20): 100000 h. (tq+25°C)

SMD LED module

Color rendering index: CRI>80

MacAdams SDCM 3

## MECHANICAL

Extruded aluminium profile housing

Metal end caps

UV-stabilized opal diffuser

IP40 protection degree

Impact resistance IK02

Glow-wire test resistance 650°C

## ELECTRICAL

Halogen-free wiring

220-240V-50/60Hz

Power factor >0.95

Constant current, Class I, isolated driver

CE - IEC 60598-1 - EN 60598-1

Ambient temperature from -20°C to +50°C

On-Off Control - (Code: .N000)

## OPTIONAL

DALI - (Code: .DXXX)

1-10V - (Code: .MXXX)



CBS connection

Color temperature (K) options

RAL colour selection

## INSTALLATION

Ceiling suspended..

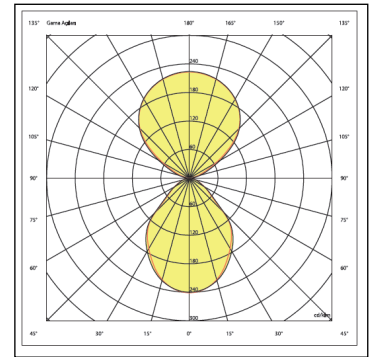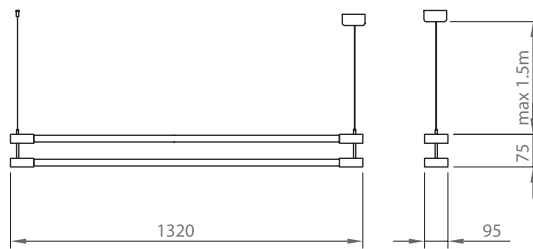

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out WxL (mm)	Weight (kg)
01136.13.30.070	72	7000	3000K	Ra>80	95x1320x75	N/A	2,8

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.