

# WINK-G 600



## Standard Colours



Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Direct&indirect distribution

Beam angle 120°

UGR<22

Lifetime (L90/B10): 50000 h.(tq+25°C)

Lifetime (L80/B20): 100000 h. (tq+25°C)

SMD LED module

Color rendering index: CRI>80

MacAdams SDCM 3

## MECHANICAL

Sheet steel housing

Opal diffuser & perforated

sheet for direct-indirect light

Tempered, transparent glass

IP65 protection degree

Glow-wire test resistance 650°C

## ELECTRICAL

Halogen-free wiring

220-240V-50/60Hz

Power factor >0.95

Constant current, Class I, isolated driver

CE - IEC 60598-1 - EN 60598-1

Ambient temperature from -20°C to +50°C

On-Off Control - (Code: .N000)

## OPTIONAL

DALI - (Code: .DXXX)

1-10V - (Code: .MXXX)

Tunable White

Flicker-free - (Code: .FXXX)

Emergency battery - (Code .X3HT)

CBS connection

UGR<19 - microprismatic diffuser (.MC)

Color rendering index: CRI >90

Color temperature (K) options



GST type connector for installation

RAL colour selection

Seismic security hanger

## INSTALLATION

Ceiling recessed mounted.

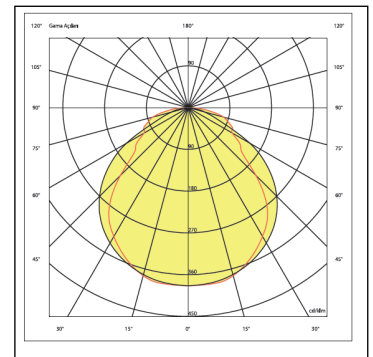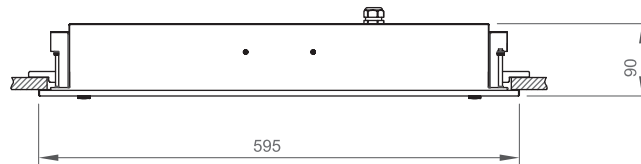

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions	Cut-Out WxL (mm)	Weight (kg)
02141.66.30.024	32	2400	3000K	Ra>80	595x595x90	580x580	6,1

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.