

ANEMON-1250



OPTICAL

Symmetric distribution
10°-25°-45°-120° beam angle options
UGR<25
Luminous efficacy >100 lm/W
Lifetime (L80/B20): 50000 h. (tq+25°C)
High Power LED module
Color rendering index: CRI>80

MECHANICAL

Extruded aluminium housing
Matte eloxal plated
Adjustable installation part
Acrylic optic lens for facade lighting
Tempered transparent glass
IP67 protection degree
Impact resistance IK09
Glow-wire test resistance 650°C

ELECTRICAL




Halogen-free wiring
220-240V-50/60Hz
Power factor >0.90
Constant current, Class I, isolated driver
CE - IEC 60598-1 - EN 60598-1
Ambient temperature from -20°C to +50°C
On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)
Color temperature (K) options
RGB option

INSTALLATION

Surface mounted.

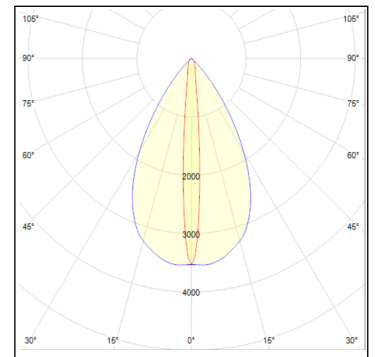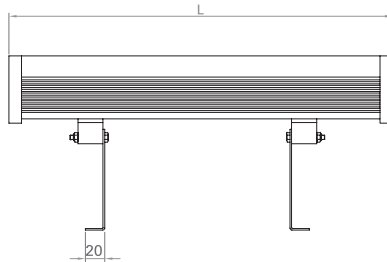

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out Q (mm)	Weight (kg)
05255.12.40.060	55	6600	4000K	Ra>80	58x1250x70	N/A	5,6

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.