

PERLA-SK3



Standard Colours



Ral 9016

Ral 9006

Ral 9005



OPTICAL

Direct symmetric distribution

Beam angle 50°

Lifetime (L90/B10): 50000 h. (tq+25°C)

Lifetime (L80/B20): 100000 h. (tq+25°C)

COB LED module

Color rendering index: CRI>80

MacAdams SDCM 3

MECHANICAL

Aluminium housing

Laser-cut sheet steel frame

Stainless steel installation clips

Aluminium reflector

Transparent diffuser

IP20 protection degree

Impact resistance IK02

Glow-wire test resistance 650°C

ELECTRICAL

Halogen-free wiring

220-240V-50/60Hz

Power factor >0.95

Constant current, Class I, isolated driver

CE - IEC 60598-1 - EN 60598-1

Ambient temperature from -20°C to +50°C

On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)

1-10V - (Code: .MXXX)

Flicker-free - (Code: .FXXX)

CBS connection

Color rendering index: CRI >90




Color temperature (K) options

RAL colour selection

Suspension kit (.S)

INSTALLATION

Ceiling surface mounted.

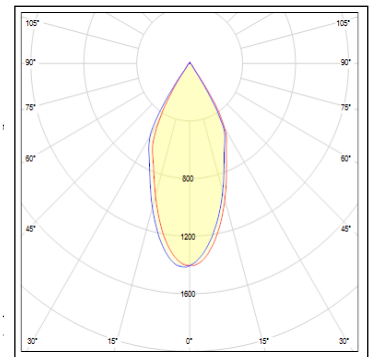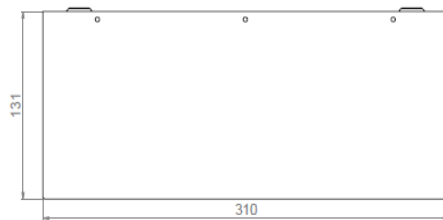

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out WxL (mm)	Weight (kg)
05480.11.40.023	3x11	2900	3000K	Ra>80	100x296x130	N/A	1,6

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.