

# Mino 80



## Standard Colours



## OPTICAL

Direct symmetric distribution  
Beam angle 38°  
Luminous efficacy >100 lm/W Lifetime (L90/B10): 50000 h.(tq+25°C) Lifetime (L80/B20): 100000 h. (tq+25°C) COB LED module

Color rendering index: CRI>80 MacAdams SDCM 3

## MECHANICAL

Die-cast aluminium housing Stainless steel installation clips Aluminium reflector Transparent diffuser

IP20 protection degree from below  
Impact resistance IK02 Glow-wire test resistance 650°C

## ELECTRICAL

Halogen-free wiring  
220-240V-50/60Hz  
Power factor >0.95  
Constant current, Class I, isolated driver CE - IEC 60598-1 - EN 60598-1  
Ambient temperature from -20°C to +50°C On-Off Control - (Code: .N000)

## OPTIONAL



DALI - (Code: .DXXX)

1-10V - (Code: .MXXX) Flicker-free - (Code: .FXXX) Emergency battery - (Code: X3HT) connection  
Color rendering index: CRI >90 Color temperature (K) options

GST type connector for installation RAL selection

## INSTALLATION

Ceiling recessed mounted.

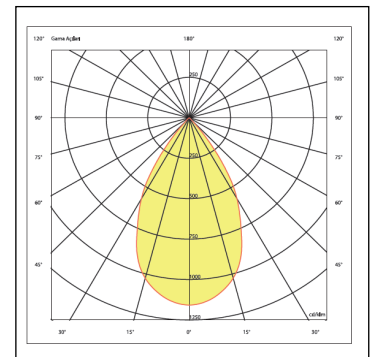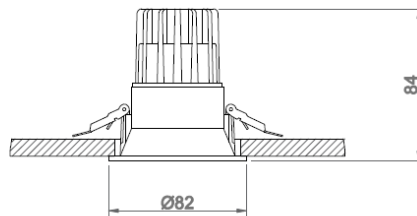

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions QxH (mm)	Cut-Out Q (mm)	Weight (kg)
05112.08.30.006	7	630	3000K	Ra>80	82x84	75	0,8
05112.08.40.006	7	665	4000K	Ra>80	82x84	75	0,8
05112.08.30.009	10	900	3000K	Ra>80	82x84	75	0,8
05112.08.40.010	10	950	4000K	Ra>80	82x84	75	0,8

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.