

# ADELLA K1



## Standard Colours



Ral 9016

Ral 9006

Ral 9005



## OPTICAL

Adjustable light up to 30 degrees

Beam angle 45°

Luminous efficacy >100 lm/W

Lifetime (L90/B10): 50000 h. (tq+25°C)

Lifetime (L80/B20): 100000 h. (tq+25°C)

COB LED module

Color rendering index: CRI>80

MacAdams SDCM 3

## MECHANICAL

Die-cast aluminium housing

Stainless steel installation clips

Aluminium reflector Transparent diffuser

IP40 protection degree from below

## ELECTRICAL

wiring

220-240V-50/60Hz

Power factor >0.95



## OPTIONAL

DALI - (Code: .DXXX)

1-10V - (Code: .MXXX) Flicker-

free - (Code: .FXXX) Emergency

battery - (Code.X3HT) CBS



connection

Color rendering index: CRI >90

Color temperature (K) options

## INSTALLATION

Ceiling recessed mounted.

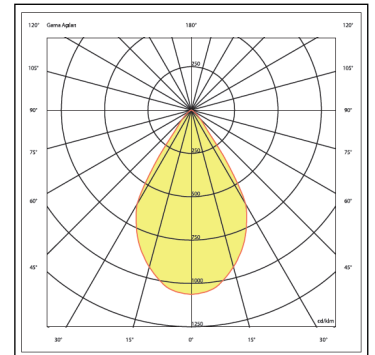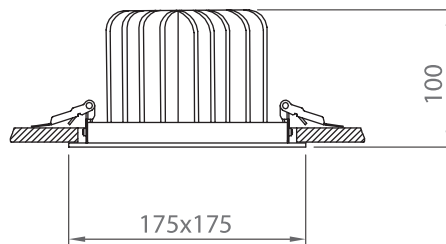

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out WxL (mm)	Weight (kg)
52682.11.40.039	34	3650	4000K	Ra>80	175x175x100	160x160	1,5

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.