

DOME-T



Color Options





Ral 9016

Ral 9006

Ral 9005

Housing	Electrostatic coated steel sheet
Optics	Electrostatic coated perforated steel reflector with electrostatic coated steel sheet on the back
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

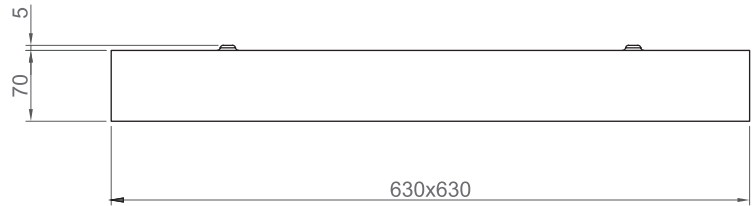

Order Code	W	Lm	CCT	CRI	Kg
03119.66.30.023	29	2320	3000	Ra>80	4,9
03119.66.30.031	41	3170	3000	Ra>80	4,9
03119.66.30.052	60	5280	3000	Ra>80	4,9
03119.66.40.024	29	2450	4000	Ra>80	4,9
03119.66.40.033	41	3360	4000	Ra>80	4,9
03119.66.40.055	60	5600	4000	Ra>80	4,9