



Color Options



Ral 9016





Ral 9006



Ral 9005

Housing	Electrostatic coated steel sheet
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

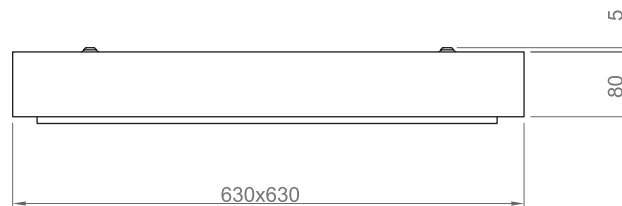

Order Code	W	Lm	CCT	CRI	Kg
03128.66.30.032	33	3200	3000	Ra>80	4,1
03128.66.40.034	33	3350	4000	Ra>80	4,1