



TECHNICAL INFORMATION

Housing	Extruded aluminum profile
Diffuser	Opal polycarbonate diffuser
LED Lifetime	50.000 hours
Mounting System	Surface

OPTICAL SPECIFICATIONS

Optical	Symmetrical
Light Exit Angle	120°
UGR Value	80

ELECTRICAL




Power (W)	11-50W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

MOUNTING

Mounting Type Surface

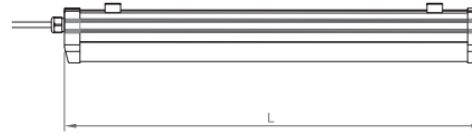

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)	Kg
07104.03.40.013	11	LED Module	1390	4000	50x315x71	0.4
07104.04.40.016	13	LED Module	1590	4000	50x455x71	0.5
07104.04.40.0207	16	LED Module	2020	4000	50x455x71	0.5
07104.07.40.019	15	LED Module	1930	4000	50x735x71	0.9
07104.07.40.024	18	LED Module	2300	4000	50x735x71	0.9
07104.07.40.030	24	LED Module	3100	4000	50x735x71	0.9
07104.07.40.033	26	LED Module	3180	4000	50x735x71	0.9
07104.08.40.037	29	LED Module	3740	4000	50x875x71	0.9
07104.10.40.028	20	LED Module	2780	4000	50x1015x71	1.0
07104.10.40.033	25	LED Module	3380	4000	50x1015x71	1.0
07104.10.40.038	29	LED Module	3830	4000	50x1015x71	1.0
07104.10.40.043	33	LED Module	4260	4000	50x1015x71	1.0
07104.11.40.033	23	LED Module	3200	4000	50x1155x71	1.6
07104.11.40.038	29	LED Module	3800	4000	50x1155x71	1.6
07104.11.40.044	34	LED Module	4320	4000	50x1155x71	1.6
07104.11.40.050	40	LED Module	4960	4000	50x1155x71	1.6
07104.14.40.041	30	LED Module	4020	4000	50x1435x71	1.9
07104.14.40.066	37	LED Module	4850	4000	50x1435x71	1.9
07104.14.40.048	43	LED Module	5460	4000	50x1435x71	1.9
07104.14.40.062	50	LED Module	6200	4000	50x1435x71	1.9

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.

The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.

Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.