


Lightline

058-Micropismatic

Indoor Lighting - Suspended, Linear

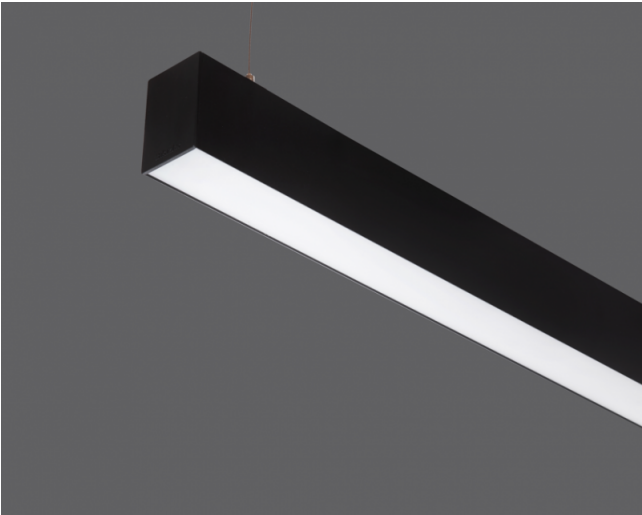

TECHNICAL INFORMATION


Housing	Extruded aluminum profile
Optics	Micro-prismatic opal polycarbonate diffuser - UGR95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit
1-10V DIM
Tunable White

MOUNTING

Mounting Type Surface, Pendant

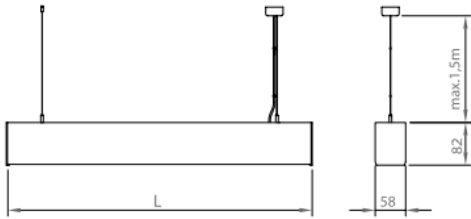

Order Code	W	Light Source	Lm	CCT	WxLxH (mm)
01180.57.30.015	15	LED Module	1650	3000	58x575x82
01180.57.40.016	15	LED Module	1730	4000	58x575x82
01180.57.30.021	21	LED Module	2310	3000	58x575x82
01180.57.40.022	21	LED Module	2420	4000	58x575x82
01180.57.30.023	22	LED Module	2420	3000	58x855x82
01180.57.40.024	22	LED Module	2530	4000	58x855x82
01180.57.30.032	31	LED Module	3410	3000	58x855x82
01180.57.40.033	31	LED Module	3585	4000	58x855x82
01180.57.30.031	29	LED Module	3190	3000	58x1135x82
01180.57.40.032	29	LED Module	3355	4000	58x1135x82
01180.57.30.043	42	LED Module	4620	3000	58x1135x82
01180.57.40.044	42	LED Module	4840	4000	58x1135x82
01180.57.30.038	36	LED Module	3960	3000	58x1415x82
01180.57.40.039	36	LED Module	4150	4000	58x1415x82
01180.57.30.053	52	LED Module	5720	3000	58x1415x82
01180.57.40.055	52	LED Module	6000	4000	58x1415x82
01180.57.30.046	43	LED Module	4840	3000	58x1695x82
01180.57.40.048	43	LED Module	5060	4000	58x1695x82
01180.57.30.064	62	LED Module	6820	3000	58x1695x82
01180.57.40.066	62	LED Module	7150	4000	58x1695x82

All electrical values given are nominal values. The luminous flux and the associated electrical load are subject to an initial tolerance of +/- 10%. Color temperature tolerance: +/-150 K. Unless otherwise stated, values are valid for an ambient temperature of 25°C.
The information containing technical parameters and product codes in the catalog and on the website may differ from standard products due to customizations made according to projects.
Ikizler Aydınlatma has the right to make changes to the products without notice. You can get up-to-date information about the products on our website.